


Connector

SC,FC,ST,LC,MTRJ,MU

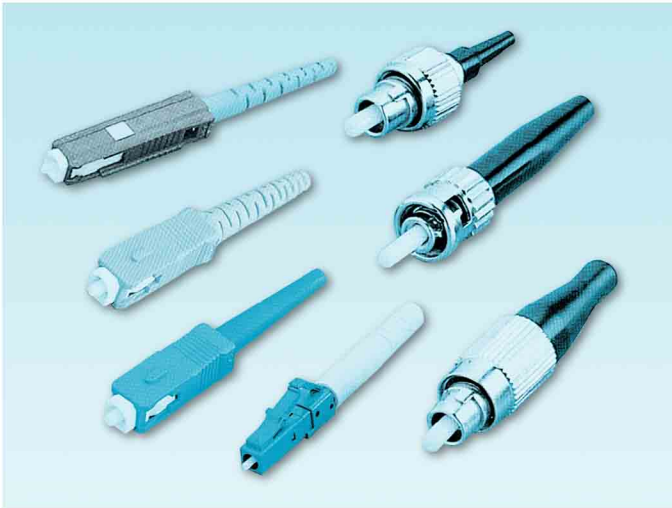

Product Description:

The connector series are ultra reliable components featuring low insertion and return loss. The connectors come with your choice of various types of commonly used models to meet the requirements.

Feature:


- Precise dimension
- Zirconia Ferrule provides extra low & stable loss
- Good durability
- Compatible with NTT standard

Application:

- Fiber Optical Telecommunications
- Lan (Local Area Network)
- CATV
- High Speed Transmission Systems
- EDFA

Parameter	Condition	Single Mode	Mult Mode
Insertion Loss	$\lambda = 1310\text{nm}$	$\leq 0.3\text{dB}$	$\leq 0.5\text{dB}$
Return Loss	PC	$\geq 45\text{dB}$	$\geq 45\text{dB}$
	APC	$\geq 65\text{dB}$	--
Ferrule ID	0.125mm~0.127mm		
Ferrule OD	2.499 ± 0.0005mm for SM		

Parts No.:



Connector Type & Polishing Type

Connector Type:

- S- SC
- F- FC
- T- ST

Polishing Type

- P- PC
- A- APC

Fiber Type

- S- SM
- M-MM

Boot Type

- 09- 0.9mm
- 30- 3.0mm