




Multi-Conductor

UL 2586

Construction

General Type

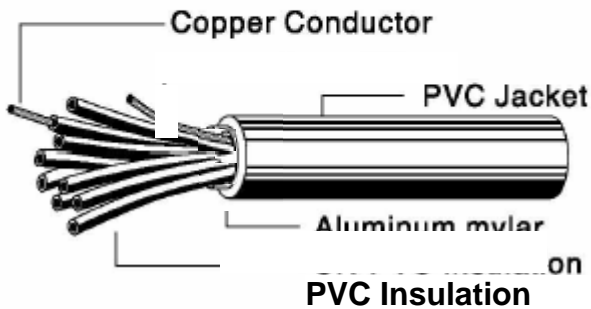

Application:


1. Control cable for electric equipment and machine etc.

Product Description

1. Conductor: Bare or Tinned stranded copper
2. Insulation: PVC
3. Jacket: PVC
4. Rated temperature: 105°C
5. Rated voltage: 600V
6. Flame test: VW-1, FT2, CM, CMG (Optional)

Construction

AL-Mylar Foil & Braid Shield Type

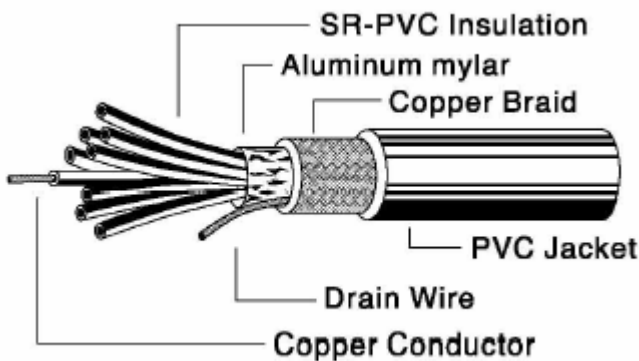

Application:

1. External interconnection of electronic equipment.

Product Description

1. Conductor: Bare or Tinned stranded copper
2. Insulation: PVC
3. Shielding: AL Mylar Foil
4. Drain: Tinned or bare stranded copper drain wire
5. Braiding: AL, Bare or Tinned copper
6. Jacket: PVC
7. Rated temperature: 105°C
8. Rated voltage: 600V
9. Flame test: VW-1, FT2, CM, CMG (Optional)

Multi-Conductor

UL 2586

General Type

Part No.	Conductor		NO. Of Core	Insulation Thickness	Insulation Diameter	Jacket Thickness	Overall Diameter		
	AWG	No./mm		mm	mm	mm	mm		
GUNF0200	20	21/0.18	2	0.79	2.55	0.79	6.7		
GUNF0300			3	0.79	2.55	0.79	7.1		
GUNF0400			4	0.79	2.55	0.79	7.8		
GUNF0500			5	0.79	2.55	0.79	8.5		
GUNF0600			6	0.79	2.55	0.79	9.3		
GUNF0700			7	0.79	2.55	0.79	9.3		
GUNF0800			8	0.79	2.55	0.79	10.1		
GUNF0900			9	0.79	2.55	0.79	10.8		
GUNF1000			10	0.79	2.55	0.79	11.8		
GUNF1100			11	0.79	2.55	0.79	11.8		
GUNF1200			12	0.79	2.55	0.79	12.2		
GUNF1500			15	0.79	2.55	0.79	13.2		
GUNF1800			18	0.79	2.55	0.79	14.4		
GUNF2500			25	0.79	2.55	0.79	16.9		
GUNF3700			37	0.79	2.55	1.55	21.0		
GUNF5000			50	0.79	2.55	1.55	23.9		
GUNG0200			18	34/0.18	2	0.79	2.80	0.79	7.2
GUNG0300					3	0.79	2.80	0.79	7.7
GUNG0400	4	0.79			2.80	0.79	8.4		
GUNG0500	5	0.79			2.80	0.79	9.2		
GUNG0600	6	0.79			2.80	0.79	10.0		
GUNG0700	7	0.79			2.80	0.79	10.0		
GUNG0800	8	0.79			2.80	0.79	11.7		
GUNG0900	9	0.79			2.80	0.79	12.8		
GUNG1000	10	0.79			2.80	0.79	12.8		
GUNG1100	11	0.79			2.80	0.79	12.8		
GUNG1200	12	0.79			2.80	0.79	13.3		
GUNG1500	15	0.79			2.80	0.79	14.4		
GUNG1800	18	0.79			2.80	0.79	15.6		
GUNG2500	25	0.79			2.80	1.55	20.0		
GUNG3700	37	0.79			2.80	1.55	22.7		
GUNG5000	50	0.79			2.80	2.05	27.0		
GUNH0200	16	26/0.254			2	0.79	3.10	0.79	7.8
GUNH0300					3	0.79	3.10	0.79	8.3
GUNH0400			4	0.79	3.10	0.79	9.1		
GUNH0500			5	0.79	3.10	0.79	10.0		
GUNH0600			6	0.79	3.10	0.79	10.9		
GUNH0700			7	0.79	3.10	0.79	10.9		
GUNH0800			8	0.79	3.10	0.79	11.9		
GUNH0900			9	0.79	3.10	0.79	12.8		
GUNH1000			10	0.79	3.10	0.79	14.0		
GUNH1100			11	0.79	3.10	0.79	14.0		
GUNH1200			12	0.79	3.10	0.79	14.5		
GUNH1500			15	0.79	3.10	0.79	15.7		
GUNH1800			18	0.79	3.10	0.79	17.1		
GUNH2500			25	0.79	3.10	1.55	21.7		
GUNH3700			37	0.79	3.10	1.55	24.8		
GUNH5000			50	0.79	3.10	2.05	29.4		

Multi-Conductor

UL 2586

General Type

Part No.	Conductor		NO. Of Core	Insulation Thickness	Insulation Diameter	Jacket Thickness	Overall Diameter		
	AWG	No./mm		mm	mm	mm	mm		
GUNI0200	14	41/0.254	2	0.79	3.50	0.79	8.6		
GUNI0300			3	0.79	3.50	0.79	9.2		
GUNI0400			4	0.79	3.50	0.79	10.1		
GUNI0500			5	0.79	3.50	0.79	11.1		
GUNI0600			6	0.79	3.50	0.79	12.1		
GUNI0700			7	0.79	3.50	0.79	12.1		
GUNI0800			8	0.79	3.50	0.79	13.2		
GUNI0900			9	0.79	3.50	0.79	14.3		
GUNI1000			10	0.79	3.50	0.79	15.6		
GUNI1100			11	0.79	3.50	0.79	15.6		
GUNI1200			12	0.79	3.50	0.79	16.2		
GUNI1500			15	0.79	3.50	0.79	17.6		
GUNI1800			18	0.79	3.50	1.55	20.6		
GUNI2500			25	0.79	3.50	1.55	24.1		
GUNI3700			37	0.79	3.50	2.05	28.6		
GUNJ0200			12	65/0.254	2	0.79	4.00	0.79	9.6
GUNJ0300					3	0.79	4.00	0.79	10.2
GUNJ0400					4	0.79	4.00	0.79	11.3
GUNJ0500	5	0.79			4.00	0.79	12.4		
GUNJ0600	6	0.79			4.00	0.79	13.6		
GUNJ0700	7	0.79			4.00	0.79	13.6		
GUNJ0800	8	0.79			4.00	0.79	14.8		
GUNJ0900	9	0.79			4.00	0.79	16.1		
GUNJ1000	10	0.79			4.00	0.79	17.6		
GUNJ1100	11	0.79			4.00	0.79	17.6		
GUNJ1200	12	0.79			4.00	1.55	19.8		
GUNJ1500	15	0.79			4.00	1.55	21.3		
GUNJ1800	18	0.79			4.00	1.55	23.1		
GUNJ2400	25	0.79			4.00	2.05	28.1		
GUNK0200	10	105/0.254			2	0.79	5.10	0.79	11.8
GUNK0300					3	0.79	5.10	0.79	12.6
GUNK0400					4	0.79	5.10	0.79	13.9
GUNK0500					5	0.79	5.10	0.79	15.4
GUNK0600			6	0.79	5.10	0.79	16.9		
GUNK0700			7	0.79	5.10	0.79	16.9		
GUNK0800			8	0.79	5.10	1.55	20.0		
GUNK0900			9	0.79	5.10	1.55	21.6		
GUNK1000			10	0.79	5.10	1.55	23.5		
GUNK1100			11	0.79	5.10	1.55	23.5		
GUNK1200			12	0.79	5.10	1.55	24.3		
GUNK1500			15	0.79	5.10	2.05	27.3		
GUNK1800			18	0.79	5.10	2.05	29.6		
GUNL0200			8	166/0.254	2	1.15	6.80	0.79	15.2
GUNL0300					3	1.15	6.80	0.79	16.3
GUNL0400					4	1.15	6.80	1.55	19.6
GUNL0500					5	1.15	6.80	1.55	21.5
GUNL0600					6	1.15	6.80	1.55	23.5
GUNL0700	7	1.15			6.80	1.55	23.5		
GUNL0800	8	1.15			6.80	2.05	26.6		
GUNL1000	10	1.15			6.80	2.05	31.3		

Multi-Conductor

UL 2586

AL Mylar Foil & Braid Shield Type

Part No.	Conductor		NO. Of Core	Insulation Thickness	Insulation Diameter	Braid Shield coverage	Jacket Thickness	Overall Diameter
	AWG	No./mm		mm	mm		mm	mm
GUNF0250	20	21/0.18	2	0.79	2.55	Option	0.79	7.3
GUNF0350			3	0.79	2.55		0.79	7.7
GUNF0450			4	0.79	2.55		0.79	8.4
GUNF0550			5	0.79	2.55		0.79	9.1
GUNF0650			6	0.79	2.55		0.79	9.9
GUNF0750			7	0.79	2.55		0.79	9.9
GUNF0850			8	0.79	2.55		0.79	10.7
GUNF0950			9	0.79	2.55		0.79	11.4
GUNF1050			10	0.79	2.55		0.79	12.4
GUNF1150			11	0.79	2.55		0.79	12.4
GUNF1250			12	0.79	2.55		0.79	12.8
GUNF1550			15	0.79	2.55		0.79	13.8
GUNF1850			18	0.79	2.55		0.79	15.0
GUNF2550			25	0.79	2.55		0.79	17.5
GUNF3750			37	0.79	2.55		1.55	21.6
GUNF5050			50	0.79	2.55		1.55	24.5
GUNG0250	18	34/0.18	2	0.79	2.80	Option	0.79	7.8
GUNG0350			3	0.79	2.80		0.79	8.3
GUNG0450			4	0.79	2.80		0.79	9.0
GUNG0550			5	0.79	2.80		0.79	9.8
GUNG0650			6	0.79	2.80		0.79	10.6
GUNG0750			7	0.79	2.80		0.79	10.6
GUNG0850			8	0.79	2.80		0.79	11.5
GUNG0950			9	0.79	2.80		0.79	12.3
GUNG1050			10	0.79	2.80		0.79	13.4
GUNG1150			11	0.79	2.80		0.79	13.4
GUNG1250			12	0.79	2.80		0.79	13.9
GUNG1550			15	0.79	2.80		0.79	15.0
GUNG1850			18	0.79	2.80		0.79	16.2
GUNG2550			25	0.79	2.80		1.55	20.5
GUNG3750			37	0.79	2.80		1.55	23.3
GUNG5050			50	0.79	2.80		2.05	27.6
GUNH0250	16	26/0.254	2	0.79	3.10	Option	0.79	8.4
GUNH0350			3	0.79	3.10		0.79	8.9
GUNH0450			4	0.79	3.10		0.79	9.7
GUNH0550			5	0.79	3.10		0.79	10.6
GUNH0650			6	0.79	3.10		0.79	11.5
GUNH0750			7	0.79	3.10		0.79	11.5
GUNH0850			8	0.79	3.10		0.79	12.5
GUNH0950			9	0.79	3.10		0.79	13.4
GUNH1050			10	0.79	3.10		0.79	14.6
GUNH1150			11	0.79	3.10		0.79	14.6
GUNH1250			12	0.79	3.10		0.79	15.1
GUNH1550			15	0.79	3.10		0.79	13.3
GUNH1850			18	0.79	3.10		0.79	17.7
GUNH2550			25	0.79	3.10		1.55	22.3
GUNH3750			37	0.79	3.10		1.55	25.4
GUNH5050			50	0.79	3.10		2.05	30.0

Multi-Conductor

UL 2586

AL Mylar Foil & Braid Shield Type

Part No.	Conductor		NO. Of Core	Insulation Thickness	Insulation Diameter	Braid Shield	Jacket Thickness	Overall Diameter			
	AWG	No./mm		mm	mm	coverage	mm	mm			
GUNI0250	14	41/0.254	2	0.79	3.50	Option	0.79	9.2			
GUNI0350			3	0.79	3.50		0.79	9.8			
GUNI0450			4	0.79	3.50		0.79	10.7			
GUNI0550			5	0.79	3.50		0.79	11.7			
GUNI0650			6	0.79	3.50		0.79	12.7			
GUNI0750			7	0.79	3.50		0.79	12.7			
GUNI0850			8	0.79	3.50		0.79	13.8			
GUNI0950			9	0.79	3.50		0.79	14.9			
GUNI1050			10	0.79	3.50		0.79	16.2			
GUNI1150			11	0.79	3.50		0.79	16.2			
GUNI1250			12	0.79	3.50		0.79	16.8			
GUNI1550			15	0.79	3.50		1.55	19.7			
GUNI1850			18	0.79	3.50		1.55	21.2			
GUNI2550			25	0.79	3.50		1.55	24.7			
GUNI3750			37	0.79	3.50		2.05	29.2			
GUNJ0250			12	65/0.254	2		0.79	4.00	Option	0.79	10.2
GUNJ0350	3	0.79			4.00	0.79	10.8				
GUNJ0450	4	0.79			4.00	0.79	11.9				
GUNJ0550	5	0.79			4.00	0.79	13.0				
GUNJ0650	6	0.79			4.00	0.79	14.2				
GUNJ0750	7	0.79			4.00	0.79	14.2				
GUNJ0850	8	0.79			4.00	0.79	15.4				
GUNJ0950	9	0.79			4.00	0.79	16.7				
GUNJ1050	10	0.79			4.00	1.55	19.7				
GUNJ1150	11	0.79			4.00	1.55	19.7				
GUNJ1250	12	0.79			4.00	1.55	20.4				
GUNJ1550	15	0.79			4.00	1.55	21.9				
GUNJ1850	18	0.79			4.00	1.55	23.7				
GUNJ2450	25	0.79			4.00	2.05	28.7				
GUNK0250	10	105/0.254			2	0.79	5.10	Option		0.79	12.4
GUNK0350					3	0.79	5.10			0.79	13.2
GUNK0450			4	0.79	5.10	0.79	14.5				
GUNK0550			5	0.79	5.10	0.79	16.0				
GUNK0650			6	0.79	5.10	0.79	17.5				
GUNK0750			7	0.79	5.10	0.79	17.5				
GUNK0850			8	0.79	5.10	1.55	20.6				
GUNK0950			9	0.79	5.10	1.55	22.2				
GUNK1050			10	0.79	5.10	1.55	24.1				
GUNK1150			11	0.79	5.10	1.55	24.1				
GUNK1250			12	0.79	5.10	1.55	24.9				
GUNK1550			15	0.79	5.10	1.55	27.9				
GUNK1850			18	0.79	5.10	2.05	30.2				
GUNL0250			8	166/0.254	2	1.15	6.80		Option	0.79	15.8
GUNL0350					3	1.15	6.80			0.79	16.9
GUNL0450					4	1.15	6.80			1.55	20.2
GUNL0550	5	1.15			6.80	1.55	22.1				
GUNL0650	6	1.15			6.80	1.55	24.1				
GUNL0750	7	1.15			6.80	1.55	24.1				
GUNL0850	8	1.15			6.80	2.05	27.2				
GUNL1050	10	1.15			6.80	2.05	31.9				