
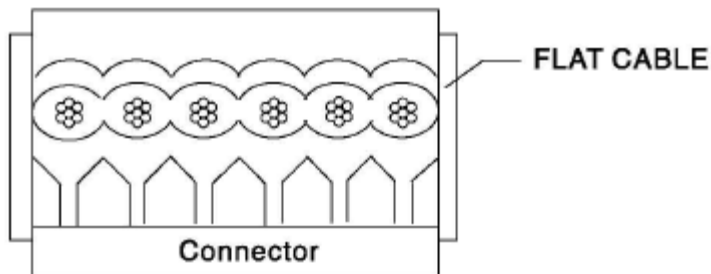


Multi-Conductor

UL 2651

Construction

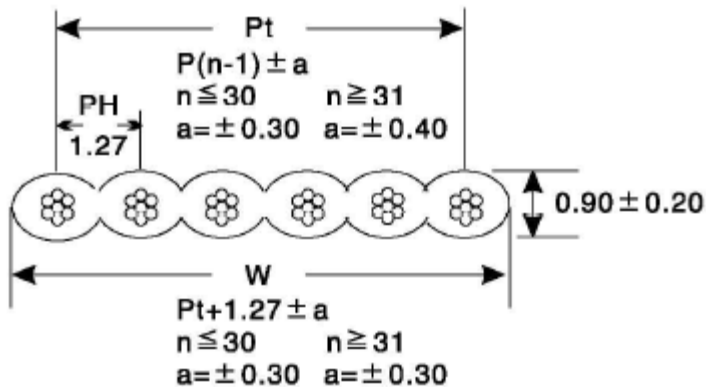

Product Description

1. Tinned or top-coated stranded copper conductor
2. Rated temperature: 105°C
3. Rated voltage: 300V
4. Passes UL VW-1 & CUL FT1, FT2 vertical flame test

Application:

1. For use in internal wiring of appliances, computers.

Part No.	Conductor		N0. Of Core	Insulation Thickness mm	Overall Diameter		Allowable Error mm
	AWG	No./mm			Thickness mm	Width mm	
GUJB0900	28	7/0.127	9	0.23	0.9	11.43	± 0.30
GUJB1000			10	0.23	0.9	12.70	± 0.30
GUJB1400			14	0.23	0.9	17.78	± 0.30
GUJB1500			15	0.23	0.9	19.05	± 0.30
GUJB1600			16	0.23	0.9	20.32	± 0.30
GUJB2000			20	0.23	0.9	25.40	± 0.30
GUJB2500			25	0.23	0.9	31.75	± 0.30
GUJB2600			26	0.23	0.9	33.02	± 0.30
GUJB3000			30	0.23	0.9	38.10	± 0.30
GUJB3400			34	0.23	0.9	43.18	± 0.40
GUJB3600			36	0.23	0.9	45.72	± 0.40
GUJB4000			40	0.23	0.9	50.80	± 0.40
GUJB5000			50	0.23	0.9	63.50	± 0.40
GUJB6000			60	0.23	0.9	76.20	± 0.40
GUJB6400			64	0.23	0.9	81.28	± 0.40