




# Hook-Up Wire

**UL 1061**

## Construction

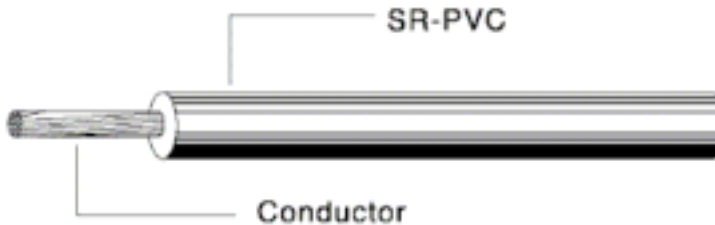

## Product Description

1. Solid or stranded, tinned or bare copper conductor 30-16AWG
2. Color-coded semi-rigid PVC insulation
3. Rated temperature : 80°C
4. Rated voltage : 300V
5. Uniform thickness of wire to ensure easy stripping and cutting
6. Passed UL VW-1 & CSA FT1 vertical flame test

## Application:

1. Internal wiring of computers, office, equipment and other electronic and electrical equipment.

Part No.	Conductor			Insulation Thickness mm	Overall Diameter mm	
	Type	AWG	No./mm			
ICA4000	Stranded	30	7/0.102	0.25	0.80	
ICB4000		28	7/0.127		0.90	
ICC4000		26	7/0.160		1.00	
ICD4000		24	7/0.203		1.10	
ICE6000		22	7/0.254		1.30	
ICF6000		20	7/0.320		1.50	
ICG6000		18	16/0.254		1.70	
ICH2000		16	26/0.254		2.00	
ICA7000		Solid	30		1/0.254	0.76
ICB7000			28		1/0.320	0.83
ICC7000	26		1/0.404	0.90		
ICD7000	24		1/0.511	1.02		
ICE9000	22		1/0.643	1.15		
ICF9000	20		1/0.813	1.32		
ICG9200	18		1/1.024	1.52		
ICH8000	16		1/1.290	1.80		