




Hook-Up Wire

UL 1332

Construction

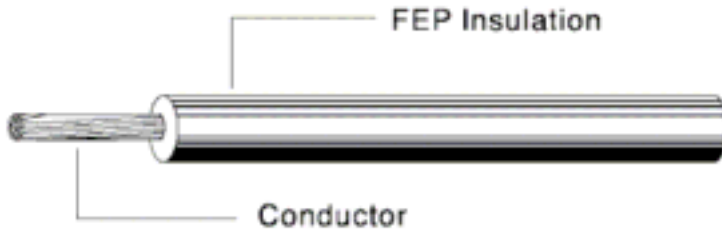

Product Description

1. Solid or stranded, silver plated or nickel coated or tinned copper conductor
2. FEP insulated high temperature single core
3. Rated temperature : 200°C
4. Rated voltage : 300V
5. Provides excellent heat resistance, cold resistance, chemical resistance, solvent resistance, and abrasion resistance.

Application:

1. Signal control and instrumentation wire, and internal of appliance and electronic equipment, such as electric heating devices, hair dryer.

| Part No. | Conductor | | | Insulation Thickness mm | Overall Diameter mm |
|----------|-----------|-----|----------|----------------------------|------------------------|
| | Type | AWG | No./mm | | |
| IDB4000 | Stranded | 28 | 7/0.127 | 0.33 | 1.04 |
| IDC4000 | | 26 | 7/0.160 | | 1.14 |
| IDD4000 | | 24 | 7/0.203 | | 1.20 |
| IDE6000 | | 22 | 7/0.254 | | 1.42 |
| IDF6000 | | 20 | 7/0.320 | | 1.56 |
| IDG8000 | | 18 | 19/0.254 | | 1.86 |
| IDH4000 | | 16 | 19/0.287 | | 2.10 |
| IDI4000 | | 14 | 19/0.373 | | 2.53 |
| IDJ4000 | | 12 | 19/0.470 | | 3.01 |