




Hook-Up Wire

UL 3132

Construction

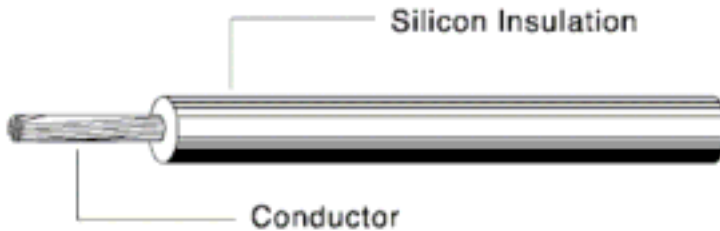

Product Description

1. Tinned, annealed, stranded or solid copper conductor 30-16AWG
2. Color-coded Silicon Rubber insulation
3. Rated temperature : 150°C
4. Rated voltage : 300V
5. Passed UL VW-1 & CSA FT1 vertical flame test
6. Resistant to acids, oils, alkalies, moisture and fungus.

Application:

1. Signal control and instrumentation wire, and internal of appliance and electronic equipment, such as electric heating devices, hair dryer.

Part No.	Conductor			Insulation Thickness mm	Overall Diameter mm		
	Type	AWG	No./mm				
IHA2000	Stranded	30	19/0.064	0.4	1.12		
IHB2000		28	19/0.080		1.20		
IHC2000		26	19/0.102		1.30		
IHD2000		24	11/0.160		1.40		
IHE4000		22	19/0.160		1.60		
IHF4000		20	10/0.260		1.80		
IHG6000		18	16/0.260		2.00		
IHH2000		16	26/0.260		2.40		
IHA5000		Top-coated	30		7/1.020	0.4	1.10
IHB5000			28		7/0.127		1.20
IHC5000	26		7/0.160	1.30			
IHD5000	24		7/0.200	1.40			
IHE7000	22		7/0.254	1.55			
IHF7000	20		7/0.320	1.75			
IHG9000	18		7/0.400	2.00			
IHH6000	16		7/0.500	2.30			
IHA7000	Solid		30	1/0.254	0.4		1.06
IHB7000			28	1/0.320			1.15
IHC7000		26	1/0.400	1.20			
IHD7000		24	1/0.530	1.35			
IHE9000		22	1/0.650	1.45			
IHF9000		20	1/0.830	1.63			
IHG9000		18	1/1.020	1.80			
IHH8000		16	1/1.290	2.10			