




Power Cable


VDE

VDE FLEXIBLE CORD

H03VVH2-F & H05VVH2-F

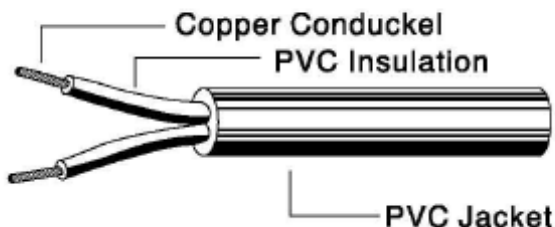

H03VV-F & H05VV-F

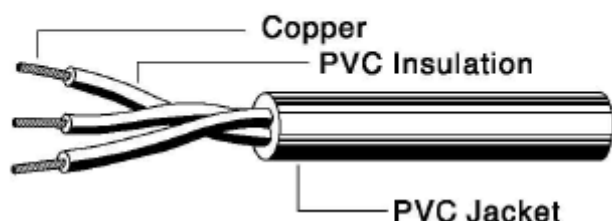

Product Description

H03VV-F and H03VVH2-F

1. Bare stranded copper conductor.
2. Color-coded PVC insulation.
3. PVC jacket cord.
4. Rated Temperature: 70°C
5. Rated Voltage: 300V/300V

H05VV-F and H05VVH2-F

1. Bare stranded copper conductor.
2. Color-coded PVC insulation.
3. PVC jacket cord.
4. Rated Temperature: 70°C
5. Rated Voltage: 300V/500V

Application:

Suitable for indoor small electrical instruments.


Part No.	Type	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		mm ²	No./mm			
GVAC0200	H03VVH2-F	2x0.50	16/0.20 or 20/0.18	0.5	0.6	3.3x5.3
GVAD0200		2x0.75	24/0.20 or 30/0.18	0.5	0.6	3.5x5.7
GVBC0200	H03VV-F	2x0.50	16/0.20 or 20/0.18	0.5	0.6	5.2
GVBD0200		2x0.75	24/0.20 or 30/0.18	0.5	0.6	5.7
GVBC0300		3x0.50	16/0.20 or 20/0.18	0.5	0.6	5.6
GVBD0300		3x0.75	24/0.20 or 30/0.18	0.5	0.6	6.1
GVGC0400		4x0.50	16/0.20 or 20/0.18	0.5	0.6	6.1
GVGD0400		4x0.75	24/0.20 or 30/0.18	0.5	0.6	6.6
GVCD0200	H05VVH2-F	2x0.75	24/0.20 or 30/0.18	0.6	0.8	4.0x6.4
GVCE0200		2x1.00	32/0.20 or 40/0.18	0.6	0.8	4.3x6.9
GVDD0200	H05VV-F	2x0.75	24/0.20 or 30/0.18	0.6	0.8	6.4
GVDE0200		2x1.00	32/0.20 or 40/0.18	0.6	0.8	6.6
GVDD0200		2x1.50	30/0.25	0.7	0.8	7.6
GVCH0200		2x2.50	50/0.25	0.8	1.0	9.4
GVCIO500		2x4.00	56/0.30	0.8	1.1	10.8
GVDD0300		3x0.75	24/0.20 or 30/0.18	0.6	0.8	6.8
GVDE0300		3x1.00	32/0.20 or 40/0.18	0.6	0.8	7.0
GVDD0300		3x1.50	30/0.25	0.7	0.9	8.3
GVDD0300		3x2.50	50/0.25	0.8	1.1	10.2
GVDD0350		3x4.00	56/0.30	0.8	1.2	11.7
GVDD0400		4x0.75	24/0.20 or 30/0.18	0.6	0.8	7.4
GVDE0400		4x1.00	32/0.20 or 40/0.18	0.6	0.9	7.9
GVDD0400		4x1.50	30/0.25	0.7	1.0	9.3
GVDD0400		4x2.50	50/0.25	0.8	1.1	11.2
GVDD0450		4x4.00	56/0.30	0.8	1.2	12.8
GVDD0500		5x0.75	24/0.20 or 30/0.18	0.6	0.9	8.3
GVDE0500		5x1.00	32/0.20 or 40/0.18	0.6	0.9	8.6
GVDD0500		5x1.50	30/0.25	0.7	1.1	10.3
GVDD0500		5x2.50	50/0.25	0.8	1.2	12.4
GVDD0550		5x4.00	56/0.30	0.8	1.4	14.5



Power Cable

VDE


H05RN, H05RR-F RUBBER CABLE

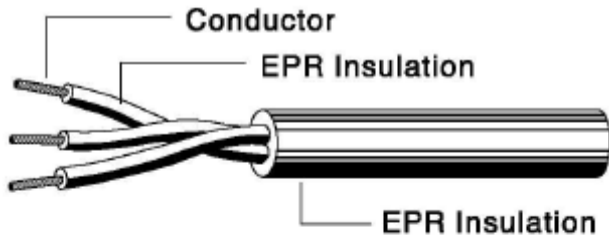

Product Description


H05RR-F

1. Operating Temperature: -15°C ~60°C
2. Rated voltage: 300V/500V
3. Test voltage: 2000V
4. Bare or tinned stranded copper conductor.
5. EPR insulation
6. Vulcanized rubber jacket type EPR

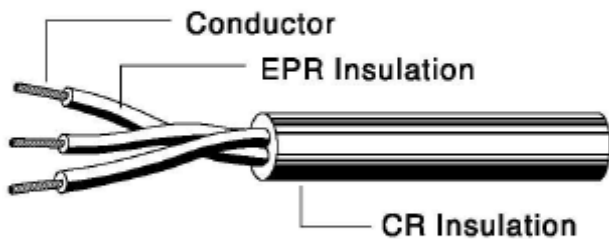

H05RN-F

1. Operating Temperature: -15°C ~60°C
2. Rated voltage: 300V/500V
3. Test voltage: 2000V
4. Bare or tinned stranded copper conductor.
5. EPR insulation.
6. CR jacket.

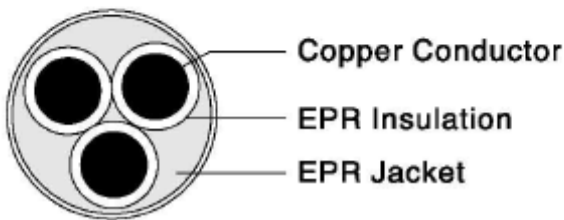

Application:

1. For high electrical equipment.

Part No.	Type	Conductor		Insulation Thickness	Overall Diameter	Max. Conductor Resistance	
		Area(mm ²)	No./mm			Un-Coating	Coating
GVED0200	H05RR-F	2x0.75	24/0.20	0.6	6.6	26.0	26.7
GVVE0200		2x1.00	32/0.20	0.6	7.1	19.5	20.0
GVED0300		3x0.75	24/0.20	0.6	7.0	26.0	26.7
GVVE0300		3x1.00	32/0.20	0.6	7.4	19.5	20.0
GVEG0200		2x1.50	30/0.25	0.8	8.6	13.3	13.7
GVEG0300		3x1.50	30/0.25	0.8	8.8	13.3	13.7
GVFD0200	H05RN-F	2x0.75	24/0.20	0.6	6.6	26.0	26.7
GVFE0200		2x1.00	32/0.20	0.6	7.1	19.5	20.0
GVFD0300		3x0.75	24/0.20	0.6	7.0	26.0	26.7
GVFE0300		3x1.00	32/0.20	0.6	7.4	19.5	20.0
GVFG0200		2x1.50	30/0.25	0.8	8.6	13.3	13.7
GVFG0300		3x1.50	30/0.25	0.8	8.6	13.3	13.7