



Audio & Video

Plastic Fiber




Product Description

- 1. Connector: Can assemble with Toslink plug or Mini-plug.
- 2. Cable Diameter: 2.2mm, 4mm, 5mm, 6mm
- 3. Insertion loss: 1 dB average.
- 4. Connector loss: 650nm wavelength<3dB
- 5. Any jacket color available.

Application

DVD, Audio, TC, Speaker, Game, HUB, Digital VCR, CATV, Computer.

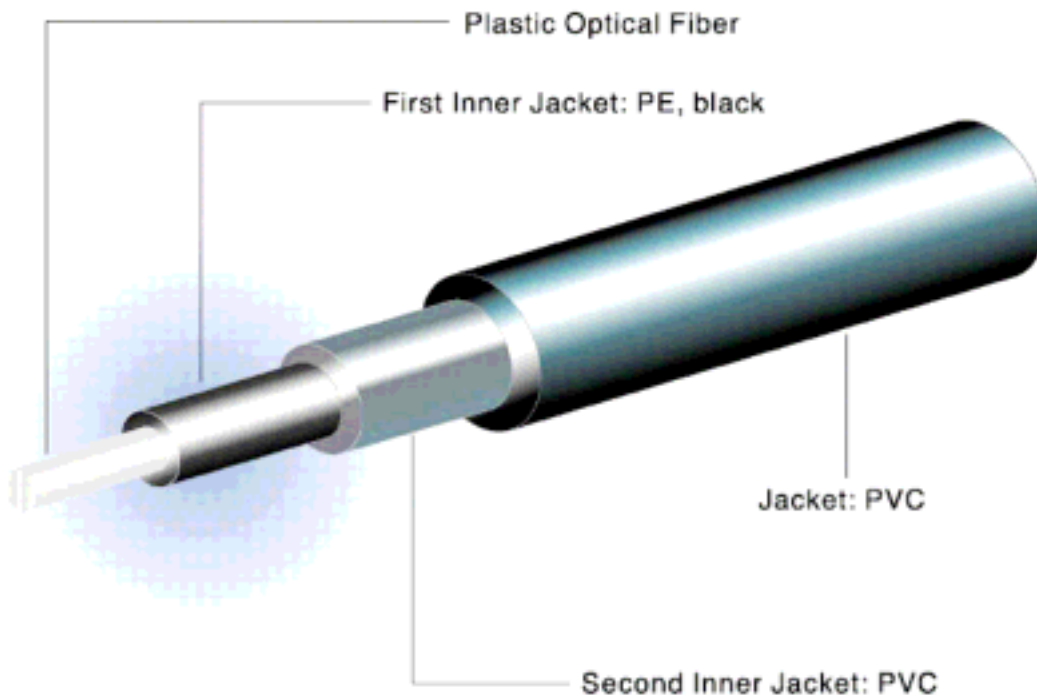



Audio & Video

Speaker & Microphone

SPC-300/200



Product Description

1. 99.996% highly pure OFC conductor wire or OFC conductor multi-stranded with Tinned copper wire.
2. Conductor wires are stranded to cut down inductance and capacitance
3. Flat design enable it to be installed under carpet.
4. The characteristics of low distortion, wide dynamic range and sweat sound quality.

SPC-100



Application

Applies to the connection of speakers to amplifier in sound system

Part No.	Description
SPC100	3/35/0.12(105C) × 2F, OD: 4.0 × 8.0mm
SPC200	7/15/0.10(105C) × 2F, OD: 4.0 × 8.0mm
SPC300	(4/48/0.1mm, BC)+(3/48/0.11mm, YC) OD: 5.0 × 10.0mm



Product Description

1. Conductor with highly pure OFC conductor.
2. Insulation with high density foam PE
3. High density OFC braiding coverage to cut down inductance and capacitance.
4. Soft and highly flexible PVC jacket.



Application

Applies to the connection of speakers to amplifier in sound system



Audio & Video

Signal & Power

Hi-End Signal Cable



Product Description

Hi-End The reason of design:

1. The main conductor is Virgin Copper combine with Silver Copper.
2. The braiding be made by twisted method to delete the reactance or Capacitance & Inductance.
3. Space tube added can reach the best result of inside resonance.
4. Outer shielding covering the space tube can cut down the capacitance between (+)(-)

S- Video



S-Video & BNC

1. High pure OFC conductor design, making low loss.
2. The insulation with highly density Foam PE.
3. Highly density braiding shielding. Effectively insulate the interference form outside. Besides, the inner without statics and making clear power source.
4. PVC jacket with good temperature, oxidation & jolt Resistance.

BNC



Application

They are specially used in interconnect between signal source and pre-amplifier, between pre-amplifier and amplifier of high-end acoustic equipment.

Power Supply



Product Description

1. Highly pure OCC conductor design, making pure power transmission.
2. High density braiding shielding. Effectively insulate the interference form outside. Besides, the inner without statics and making clear power source.
3. PVC jacket with good temperature, oxidation & jolt Resistance..

Application

Applies to the connection of speakers to amplifier in sound system