




Automobile Wire

AVSS

Very Thin Low-Voltage Cable For Automobile

Construction

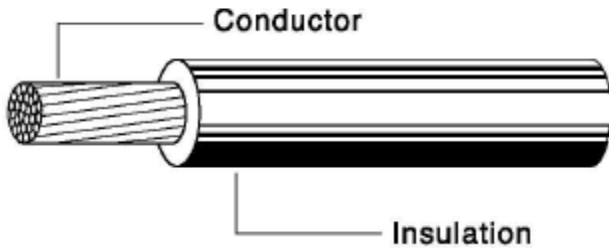

Product Description

1. Reference standard: JIS C3406
2. Resistant to heat, oil, abrasion and cold
3. Excellent flexibility
4. Stranded copper conductor

Application:

1. Internal wiring in automobile where high flexibility, thermo and mechanical strength are required.

Part No.	Conductor				Insulation Thickness	Overall Diameter		Conductor Resistance
	Nominal Sectional Area	Number and Diameter	Calculated Sectional Area	Diameter Of Conductor		Standard	Maximum	
	mm ²	No./mm	mm ²	mm		mm	mm	
DDB7000	0.3	7/0.26	0.3176	0.8	0.3	1.4	1.5	50.2
DDC3000	0.5	7/0.32	0.5629	1.0	0.3	1.6	1.7	32.7
DDD5000	0.85	19/0.24	0.8595	1.2	0.3	1.8	1.9	21.7
DDE2000	1.25	19/0.29	1.2550	1.5	0.3	2.1	2.2	14.9
DDF1000	2.0	37/0.26	1.9644	1.8	0.4	2.6	2.7	9.5