


Multi-Conductor Construction

VCTF and HVCTF

Product Description

1. Conductor: Bare copper
2. Insulation: PVC
3. Jacket: PVC
4. Rated temperature: 60°C~105°C
5. Rated voltage: 300V

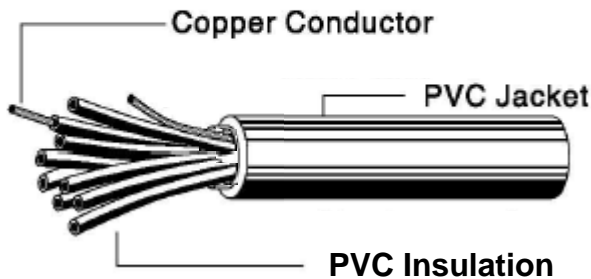

Application: Control cable for electric equipment and machine etc.

VCTF and HVCTF

Part No.	Conductor		NO. Of Core	Insulation Thickness mm	Insulation Diameter mm	Jacket Thickness mm	Overall Diameter mm	Weight kg/100m
	Sec. area	No./mm						
GNCC0200	0.5mm ²	20/0.18	2	0.6	2.1	1.0	6.3	5.0
GNCC0300			3	0.6	2.1	1.0	6.7	6.0
GNCC0400			4	0.6	2.1	1.0	7.2	7.0
GNCC0500			5	0.6	2.1	1.0	7.8	9.0
GNCC0600			6	0.6	2.1	1.0	8.4	10.0
GNCC0700			7	0.6	2.1	1.0	8.4	11.0
GNCC0800			8	0.6	2.1	1.0	9.1	12.0
GNCC0900			9	0.6	2.1	1.0	9.7	14.0
GNCC1000			10	0.6	2.1	1.0	10.5	15.0
GNCC1100			11	0.6	2.1	1.0	10.5	16.0
GNCC1200			12	0.6	2.1	1.0	10.9	17.0
GNCC1300			13	0.6	2.1	1.0	11.4	19.0
GNCC1400			14	0.6	2.1	1.0	11.4	19.0
GNCC1500			15	0.6	2.1	1.0	11.7	20.0
GNCC1600			16	0.6	2.1	1.0	12.0	22.0
GNCC1700			17	0.6	2.1	1.0	12.6	23.0
GNCC1800			18	0.6	2.1	1.0	12.6	24.0
GNCC1900			19	0.6	2.1	1.0	12.6	25.0
GNCC2000			20	0.6	2.1	1.0	13.3	26.0
GNCC2100			21	0.6	2.1	1.0	13.3	27.0
GNCC2200			22	0.6	2.1	1.0	13.9	29.0
GNCC2300			23	0.6	2.1	1.0	13.9	29.0
GNCC2400			24	0.6	2.1	1.0	14.7	32.0
GNCC2500			25	0.6	2.1	1.0	14.7	32.0
GNCC2600			26	0.6	2.1	1.0	14.7	33.0
GNCC2700			27	0.6	2.1	1.0	15.1	35.0
GNCC2800			28	0.6	2.1	1.0	15.1	35.0
GNCC2900			29	0.6	2.1	1.0	15.6	37.0
GNCC3000			30	0.6	2.1	1.0	15.6	38.0

Multi-Conductor

VCTF and HVCTF

VCTF and HVCTF

Part No.	Conductor		NO. Of Core	Insulation Thickness mm	Insulation Diameter mm	Jacket Thickness mm	Overall Diameter mm	Weight kg/100m
	Sec. area	No./mm						
GNCD0200	0.75mm ²	30/0.18	2	0.6	2.3	1.0	6.6	6.0
GNCD0300			3	0.6	2.3	1.0	7.0	7.0
GNCD0400			4	0.6	2.3	1.0	7.6	9.0
GNCD0500			5	0.6	2.3	1.0	8.2	10.5
GNCD0600			6	0.6	2.3	1.0	8.9	12.0
GNCD0700			7	0.6	2.3	1.0	8.9	12.7
GNCD0800			8	0.6	2.3	1.0	10.0	15.5
GNCD0900			9	0.6	2.3	1.0	10.5	17.0
GNCD1000			10	0.6	2.3	1.0	12.0	20.0
GNCD1100			11	0.6	2.3	1.0	12.3	20.0
GNCD1200			12	0.6	2.3	1.0	12.5	22.5
GNCD1300			13	0.6	2.3	1.0	12.6	23.0
GNCD1400			14	0.6	2.3	1.0	12.6	24.0
GNCD1500			15	0.6	2.3	1.0	12.6	26.0
GNCD1600			16	0.6	2.3	1.0	13.2	28.0
GNCD1700			17	0.6	2.3	1.0	13.6	29.0
GNCD1800			18	0.6	2.3	1.0	13.6	30.0
GNCD1900			19	0.6	2.3	1.0	13.6	31.0
GNCD2000			20	0.6	2.3	1.0	15.2	35.0
GNCD2100			21	0.6	2.3	1.0	15.2	35.5
GNCD2200			22	0.6	2.3	1.0	15.4	36.0
GNCD2300			23	0.6	2.3	1.0	15.4	37.0
GNCD2400			24	0.6	2.3	1.0	17.1	41.0
GNCD2500			25	0.6	2.3	1.0	17.1	42.0
GNCD2600			26	0.6	2.3	1.0	17.1	42.0
GNCD2700			27	0.6	2.3	1.0	17.4	44.0
GNCD2800			28	0.6	2.3	1.0	17.4	45.0
GNCD2900			29	0.6	2.3	1.0	17.8	47.0
GNCD3000			30	0.6	2.3	1.0	18.1	50.5
GNCR0200			1.0mm ²	40/0.18	2	0.6	2.5	1.0
GNCR0300	3	0.6			2.5	1.0	7.4	8.2
GNCR0400	4	0.6			2.5	1.0	8.0	10.5
GNCR0500	5	0.6			2.5	1.0	8.8	12.0
GNCR0600	6	0.6			2.5	1.0	9.5	14.0
GNCR0700	7	0.6			2.5	1.0	9.5	15.0
GNCR0800	8	0.6			2.5	1.0	11.2	18.5
GNCR0900	9	0.6			2.5	1.0	11.5	20.0
GNCR1000	10	0.6			2.5	1.0	12.9	23.5
GNCR1100	11	0.6			2.5	1.0	13.0	24.0
GNCR1200	12	0.6			2.5	1.0	13.3	26.5
GNCR1300	13	0.6			2.5	1.0	13.5	28.0
GNCR1400	14	0.6			2.5	1.0	13.5	29.0
GNCR1500	15	0.6			2.5	1.0	13.5	31.0
GNCR1600	16	0.6			2.5	1.0	15.1	34.5
GNCR1700	17	0.6			2.5	1.0	15.3	35.0
GNCR1800	18	0.6			2.5	1.0	15.3	36.0
GNCR1900	19	0.6			2.5	1.0	15.3	37.0
GNCR2000	20	0.6			2.5	1.0	16.2	41.5
GNCR2100	21	0.6			2.5	1.0	16.2	42.0
GNCR2200	22	0.6			2.5	1.0	16.4	44.0
GNCR2300	23	0.6			2.5	1.0	16.4	45.0
GNCR2400	24	0.6			2.5	1.0	18.3	50.0
GNCR2500	25	0.6			2.5	1.0	18.3	50.0
GNCR2600	26	0.6			2.5	1.0	18.3	51.0
GNCR2700	27	0.6			2.5	1.0	18.5	53.0
GNCR2800	28	0.6			2.5	1.0	18.5	54.0
GNCR2900	29	0.6			2.5	1.0	18.9	57.0
GNCR3000	30	0.6			2.5	1.0	19.3	60.0

Multi-Conductor

VCTF and HVCTF

VCTF and HVCTF

Part No.	Conductor		NO. Of Core	Insulation Thickness	Insulation Diameter	Jacket Thickness	Overall Diameter	Weight
	Sec. area	No./mm		mm	mm	mm	mm	kg/100m
GNCE0200	1.25mm ²	50/0.18	2	0.6	2.7	1.0	7.4	8.0
GNCE0300			3	0.6	2.7	1.0	7.8	9.5
GNCE0400			4	0.6	2.7	1.0	8.5	12.0
GNCE0500			5	0.6	2.7	1.0	9.3	14.0
GNCE0600			6	0.6	2.7	1.0	10.5	17.0
GNCE0700			7	0.6	2.7	1.0	10.5	18.5
GNCE0800			8	0.6	2.7	1.0	11.8	21.5
GNCE0900			9	0.6	2.7	1.0	12.3	23.0
GNCE1000			10	0.6	2.7	1.0	13.7	27.0
GNCE1100			11	0.6	2.7	1.0	13.8	28.0
GNCE1200			12	0.6	2.7	1.0	14.1	31.0
GNCE1300			13	0.6	2.7	1.0	14.3	33.0
GNCE1400			14	0.6	2.7	1.0	14.3	34.0
GNCE1500			15	0.6	2.7	1.0	14.4	36.0
GNCE1600			16	0.6	2.7	1.0	16.0	40.0
GNCE1700			17	0.6	2.7	1.0	16.3	41.0
GNCE1800			18	0.6	2.7	1.0	16.3	42.0
GNCE1900			19	0.6	2.7	1.0	16.3	44.0
GNCE2000			20	0.6	2.7	1.0	17.3	48.5
GNCE2100			21	0.6	2.7	1.0	17.3	49.0
GNCE2200			22	0.6	2.7	1.0	17.5	51.0
GNCE2300			23	0.6	2.7	1.0	17.5	53.0
GNCE2400			24	0.6	2.7	1.0	19.5	59.0
GNCE2500			25	0.6	2.7	1.0	19.5	59.0
GNCE2600			26	0.6	2.7	1.0	19.5	60.0
GNCE2700			27	0.6	2.7	1.0	19.8	63.0
GNCE2800			28	0.6	2.7	1.0	19.8	64.0
GNCE2900			29	0.6	2.7	1.0	20.2	67.0
GNCE3000			30	0.6	2.7	1.0	20.6	70.0
GNCF0200			2.0mm ²	37/0.26	2	0.6	3.0	1.0
GNCF0300	3	0.6			3.0	1.0	8.5	12.0
GNCF0400	4	0.6			3.0	1.0	9.3	15.0
GNCF0500	5	0.6			3.0	1.0	10.5	18.5
GNCF0600	6	0.6			3.0	1.0	11.4	22.0
GNCF0700	7	0.6			3.0	1.0	11.4	23.5
GNCF0800	8	0.6			3.0	1.0	12.8	28.0
GNCF0900	9	0.6			3.0	1.0	13.0	31.0
GNCF1000	10	0.6			3.0	1.0	13.3	36.0
GNCF1100	11	0.6			3.0	1.0	14.1	37.0
GNCF1200	12	0.6			3.0	1.0	15.8	41.5
GNCF1300	13	0.6			3.0	1.0	16.0	43.0
GNCF1400	14	0.6			3.0	1.0	16.0	46.0
GNCF1500	15	0.6			3.0	1.0	16.0	48.0
GNCF1600	16	0.6			3.0	1.0	17.4	53.0
GNCF1700	17	0.6			3.0	1.0	17.6	55.0
GNCF1800	18	0.6			3.0	1.0	17.6	57.0
GNCF1900	19	0.6			3.0	1.0	17.6	59.0
GNCF2000	20	0.6			3.0	1.0	18.8	64.5
GNCF2100	21	0.6			3.0	1.0	18.8	66.0
GNCF2200	22	0.6			3.0	1.0	19.1	70.0
GNCF2300	23	0.6			3.0	1.0	19.1	72.0
GNCF2400	24	0.6			3.0	1.0	21.3	75.0
GNCF2500	25	0.6			3.0	1.0	21.3	80.0
GNCF2600	26	0.6			3.0	1.0	21.3	82.0
GNCF2700	27	0.6			3.0	1.0	21.5	85.0
GNCF2800	28	0.6			3.0	1.0	21.5	87.0
GNCF2900	29	0.6			3.0	1.0	21.9	91.0
GNCF3000	30	0.6			3.0	1.0	22.6	95.0