


# Multi-Conductor

**UL 2468**

## Construction

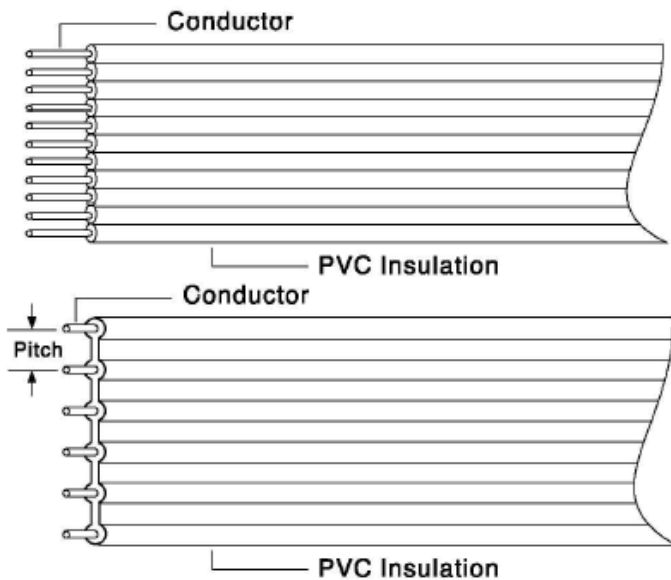

## Product Description

1. Tinned or bare stranded copper conductor
2. Color-coded PVC or semi-rigid PVC insulation
3. Rated temperature: 80°C
4. Rated voltage: 300V
5. Pass VW-1 vertical flame test

## Application:

1. For use in internal wiring of appliances, computers.

Part No.	Conductor		Pitch mm	NO. Of Core	Insulation Thickness mm	Overall Diameter mm
	AWG	No./mm				
GUID0200	24	7/0.203	1.6	2	0.45	1.5×3.1
GUID0300				3		1.5×4.7
GUID0400				4		1.5×6.3
GUID0500				5		1.5×7.9
GUID0600				6		1.5×9.5
GUID0700				7		1.5×11.1
GUID0800				8		1.5×12.7
GUID0900				9		1.5×14.3
GUID1000				10		1.5×15.9
GUID1100				11		1.5×17.5
GUID1200				12		1.5×19.1
GUID1300				13		1.5×20.7
GUID1400				14		1.5×22.3
GUID1500				15		1.5×23.9
GUID1600				16		1.5×25.5
GUID1700				17		1.5×27.1
GUID0210				24		7/0.203
GUID0310	3	1.5×5.5				
GUID0410	4	1.5×7.5				
GUID0510	5	1.5×9.5				
GUID0610	6	1.5×11.5				
GUID0710	7	1.5×13.5				
GUID0810	8	1.5×15.5				
GUID0910	9	1.5×17.5				
GUID1010	10	1.5×19.5				
GUID1110	11	1.5×21.5				
GUID1210	12	1.5×23.5				
GUID1310	13	1.5×25.5				
GUID1410	14	1.5×27.5				
GUID1510	15	1.5×29.5				
GUID1610	16	1.5×31.5				
GUID1710	17	1.5×33.5				