


## Hook-Up Wire

**UL 1007**

### Construction

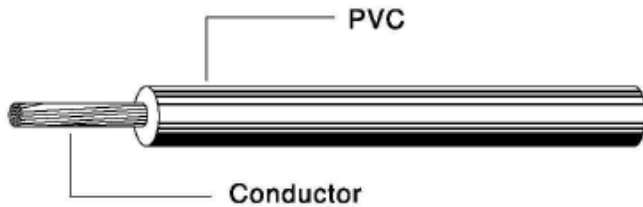

### Product Description

1. Tinned, annealed, stranded or solid copper conductor 32-16AWG
2. Color-coded PVC insulation
3. Rated temperature : 80°C
4. Rated voltage : 300V
5. Pass UL VW-1 & CSA FT1 vertical flame test
6. Uniform thickness of wire to ensure easy stripping and cutting
7. Resistant to acids, oils, alkalies, moisture and fungus
8. RoHS complaint

### Application:

General purpose internal wiring of electronic and electrical equipment

Ordering No.	Conductor			Insulation Thickness mm	Overall Diameter mm
	Type	AWG	No./mm		
IAA4000	Stranded	30	7/0.102	0.41	1.10
IAB4000		28	7/0.127		1.20
IAC4000		26	7/0.160		1.30
IAD2000		24	11/0.160		1.40
IAE2000		22	17/0.160		1.60
IAF2000		20	21/0.180		1.80
IAG4000		18	34/0.180		2.10
IAH2000		16	26/0.254		2.40
IAC5000	Top-coated	26	7/0.160		1.30
IAD5000		24	7/0.203		1.40
IAE7000		22	7/0.254		1.60
IAF7000		20	7/0.320		1.80
IAG9000		18	7/0.404		2.10
IAH5000		16	7/0.488		2.30
IAC7000	Solid	26	1/0.404		1.25
IAD7000		24	1/0.511		1.35
IAE9000		22	1/0.643	1.50	
IAF9000		20	1/0.813	1.65	
IAG9200		18	1/1.024	1.85	
IAH8000		16	1/1.290	2.15	