


## Hook-Up Wire

**UL 1015**

### Construction

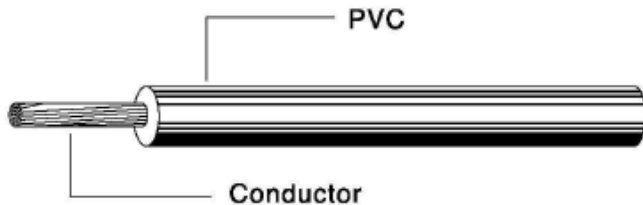

### Product Description

1. Solid or stranded, tinned or bare copper conductor 28-4/0AWG
2. Color-coded PVC insulation
3. Rated temperature : -20°C ~ 105°C
4. Rated voltage : 600V
5. Uniform thickness of wire to ensure easy stripping and cutting
6. Resistant to acids, oils, alkalis, moisture and fungus
7. Pass UL VW-1 & CSA FT1 vertical flame test
8. RoHS complaint

### Application:

General purpose internal wiring of electronic & electrical equipment

Prdering No.	Conductor			Insulation Thickness mm	Overall Diameter mm	
	Type	AWG	No./mm			
IBC4000	Stranded	26	7/0.160	0.79	2.05	
IBD2000		24	11/0.160		2.20	
IBE2000		22	17/0.160		2.40	
IBF2000		20	21/0.180		2.55	
IBG4000		18	34/0.180		2.80	
IBH2000		16	26/0.254		3.10	
IBI2000		14	41/0.254		3.50	
IBJ2000		12	65/0.254		3.90	
IBK2000		10	105/0.254		5.10	
IBL2000		8	166/0.254		1.15	6.70
IBM2000		6	266/0.254	1.55	8.60	
IBN2000		4	420/0.254		9.90	
IBO2000		2	665/0.254		11.90	
IBP1000		1	836/0.254	2.05	14.30	
IBP2000		1/0	1064/0.254		15.00	
IBP3000		2/0	1332/0.254		16.70	
IBP4000		3/0	1665/0.254		18.50	
IBP5000		4/0	2109/0.254		20.00	
IBE7000		Top-coated	22	7/0.254	0.79	2.38
IBF7000			20	7/0.320		2.55
IBG9000	18		7/0.404	2.80		
IBC7000	Solid	26	1/0.404	2.00		
IBD7000		24	1/0.511	2.10		
IBE9000		22	1/0.643	2.25		
IBF9000		20	1/0.813	2.40		
IBG9200		18	1/1.024	2.65		
IBH8000		16	1/1.290	2.90		
IBI6000		14	1/1.630	3.25		
IBJ6000		12	1/2.050	3.65		
IBK4000		10	1/2.588	4.20		