


Hook-Up Wire

UL 1332

Construction

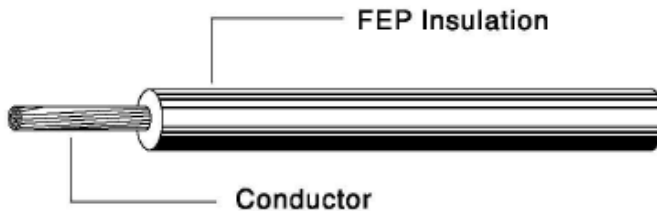

Product Description

1. Solid or stranded, silver plated or nickel coated or tinned copper conductor
2. FEP insulated high temperature single core
3. Rated temperature : 200°C
4. Rated voltage : 300V
5. Provides excellent heat resistance, cold resistance, chemical resistance, solvent resistance, and abrasion resistance
6. Pass UL VW-1 & CSA FT1 vertical flame test
7. RoHS complaint

Application:

Signal control and instrumentation wire, and internal of appliance and electronic equipment, such as electric heating devices, hair dryer

Ordering No.	Conductor			Insulation Thickness mm	Overall Diameter mm
	Type	AWG	No./mm		
IDB4000	Stranded	28	7/0.127	0.33	1.04
IDC4000		26	7/0.160		1.14
IDD4000		24	7/0.203		1.20
IDE6000		22	7/0.254		1.42
IDF6000		20	7/0.320		1.56
IDG8000		18	19/0.240		1.86
IDH4000		16	19/0.287		2.10
IDI4000		14	19/0.373		2.53
IDJ4000		12	19/0.470		3.01