


Multi-Conductor

UL2464

AL-Mylar Foil Type

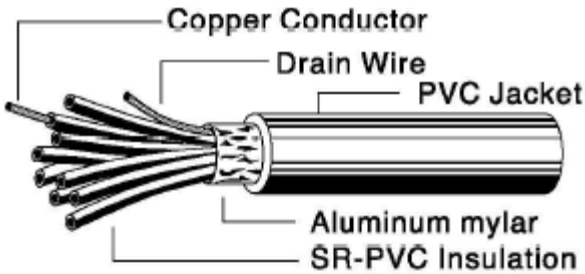


Description:

1. Tinned stranded copper conductor
2. Color-coded PVC or semi-rigid PVC insulation
3. Cores cable under aluminium mylar shield
4. Tinned stranded copper drain wire
5. PVC jacket unpaired computer and data transmission
6. Rated temperature: 80°C
7. Rated voltage: 300V
8. Pass VW-1 SC vertical flame test
9. CL3 approval

Application:

Sound broadcast, audio, instrumentation and computer cable for EIA RS-232 applications.

AL-Mylar Foil & Braid Shield Type

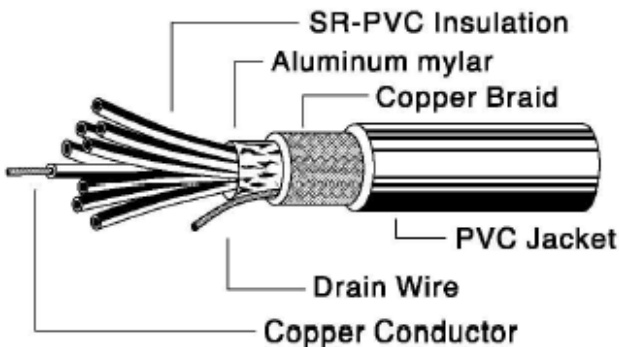

Description:

1. Tinned stranded copper conductor
2. Color-coded PVC or semi-rigid PVC insulation
3. Cores cable under aluminium mylar shield
4. Tinned stranded copper drain wire
5. Tinned copper braid shield, coverage is optional
6. PVC jacket unpaired computer and data transmission cable
7. Rated temperature: 80°C
8. Rated voltage: 300V
9. Pass VW-1 SC vertical flame test
10. CL3 approval

Application:

Computer cable for EIA RS-232 and CDA/CAM applications

Type	Insulation marking																	
UL2464 Dot/color marking	#	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
	Color	RD	WH	BK	GR	YE	BL	GA	OR	VI	BR	PK	LG	LB	LO	WH/BK	WH/RD	
	20 C	WH (BK1-5dot、RD1-5dot)、PK (BK1-5dot、RD1-5dot)																
	25 C	WH (BK1-5dot)、PK (BK1-5dot、RD1-5dot)、YE (BK1-5dot、RD1-5dot)																
	30 C	WH (BK1-5dot、RD1-5dot)、PK(BK1-5dot、RD1-5dot)、YE(BK1-5dot、RD1-5dot)																
	40 C	WH (BK1-5dot、RD1-5dot)、PK (BK1-5dot、RD1-5dot)、YE (BK1-5dot、RD1-5dot)、LG (BK1-5dot、RD1-5dot)																
	50 C	WH (BK1-5dot、RD1-5dot)、PK (BK1-5dot、RD1-5dot)、YE (BK1-5dot、RD1-5dot)、LG (BK1-5dot、RD1-5dot)、GA (BK1-5dot、RD1-5dot)																
	*	1 dot	■						■						■			
		2 dot	■ ■						■ ■						■ ■			
		3 dot	■ ■ ■						■ ■ ■						■ ■ ■			
	4 dot	■ ■ ■ ■						■ ■ ■ ■						■ ■ ■ ■				
	5 dot	■■■■■						■■■■■						■■■■■				

Multi-Conductor

UL2464

AL-Mylar Foil Type

Ordering #	Conductor		Core #	Nom. Insulation Thickness	Insulation Diameter	Jacket Thickness	Overall Diameter		
	(Sec. area)	(No./mm)		(mm)	(mm)	(mm)	(mm)		
GUBB0300	28	7/0.127	3	0.25	0.9	0.80	3.7		
GUBB0400			4	0.25	0.9	0.80	3.9		
GUBB0500			5	0.25	0.9	0.80	4.2		
GUBB0600			6	0.25	0.9	0.80	4.5		
GUBB0700			7	0.25	0.9	0.80	4.5		
GUBB0800			8	0.25	0.9	0.80	4.8		
GUBB0900			9	0.25	0.9	0.80	5.1		
GUBB1000			10	0.25	0.9	0.80	5.2		
GUBB1500			15	0.25	0.9	0.85	5.8		
GUBB2500			25	0.25	0.9	1.00	7.6		
GUBB3700			37	0.25	0.9	1.00	8.3		
GUBB5000			50	0.25	0.9	1.00	9.5		
GUBC0300			26	7/0.16	3	0.25	1.0	0.80	3.9
GUBC0400					4	0.25	1.0	0.80	4.2
GUBC0500	5	0.25			1.0	0.80	4.5		
GUBC0600	6	0.25			1.0	0.80	4.8		
GUBC0700	7	0.25			1.0	0.80	4.8		
GUBC0800	8	0.25			1.0	0.80	5.1		
GUBC0900	9	0.25			1.0	0.80	5.4		
GUBC1000	10	0.25			1.0	0.80	5.7		
GUBC1500	15	0.25			1.0	0.85	6.4		
GUBC2500	25	0.25			1.0	1.00	8.0		
GUBC3700	37	0.25			1.0	1.00	9.2		
GUBC5000	50	0.25			1.0	1.00	10.4		
GUBD0300	24	7/0.203			3	0.25	1.1	0.80	4.2
GUBD0400					4	0.25	1.1	0.80	4.5
GUBD0500			5	0.25	1.1	0.80	4.9		
GUBD0600			6	0.25	1.1	0.80	5.2		
GUBD0700			7	0.25	1.1	0.80	5.2		
GUBD0800			8	0.25	1.1	0.80	5.5		
GUBD0900			9	0.25	1.1	0.85	5.8		
GUBD1000			10	0.25	1.1	0.85	6.2		
GUBD1500			15	0.25	1.1	0.85	6.9		
GUBD2500			25	0.25	1.1	1.00	8.6		
GUBD3700			37	0.25	1.1	1.00	9.8		
GUBD5000			50	0.25	1.1	1.00	11.4		
GUBE0300			22	17/0.16	3	0.25	1.3	0.80	4.7
GUBE0400					4	0.25	1.3	0.80	5.1
GUBE0500	5	0.25			1.3	0.80	5.5		
GUBE0600	6	0.25			1.3	0.80	5.8		
GUBE0700	7	0.25			1.3	0.80	5.8		
GUBE0800	8	0.25			1.3	0.85	6.3		
GUBE0900	9	0.25			1.3	0.85	6.7		
GUBE1000	10	0.25			1.3	0.85	6.8		
GUBE1500	15	0.25			1.3	0.85	7.8		
GUBE2500	25	0.25			1.3	1.00	10.0		
GUBE3700	37	0.25			1.3	1.00	11.3		
GUBE5000	50	0.25			1.3	1.00	12.9		
GUBG0200	18	34/0.18			2	0.4	2.0	0.80	5.8
GUBG0300					3	0.4	2.0	0.80	6.0
GUBG0400			4	0.4	2.0	0.85	6.6		
GUBG0500			5	0.4	2.0	0.85	7.2		

Multi-Conductor

UL2464

AL-Mylar Foil & Braid Shield Type


Ordering #	Conductor		Core #	Nom. Insulation Thickness	Insulation Diameter	Braid Shield	Jacket Thickness	Overall Diameter		
	(Sec. area)	(No./mm)		(mm)	(mm)	Coverage(%)	(mm)	(mm)		
GUCB0300	28	7/0.127	3	0.25	0.9	Optional	0.80	4.3		
GUCB0400			4	0.25	0.9	Optional	0.80	4.6		
GUCB0500			5	0.25	0.9	Optional	0.80	4.8		
GUCB0600			6	0.25	0.9	Optional	0.80	5.2		
GUCB0700			7	0.25	0.9	Optional	0.80	5.2		
GUCB0800			8	0.25	0.9	Optional	0.80	5.4		
GUCB0900			9	0.25	0.9	Optional	0.80	5.7		
GUCB1000			10	0.25	0.9	Optional	0.80	5.8		
GUCB1500			15	0.25	0.9	Optional	0.85	6.4		
GUCB2500			25	0.25	0.9	Optional	1.00	8.1		
GUCB3700			37	0.25	0.9	Optional	1.00	8.9		
GUCB5000			50	0.25	0.9	Optional	1.00	10.1		
GUCC0300			26	7/0.16	3	0.25	1.0	Optional	0.80	4.5
GUCC0400					4	0.25	1.0	Optional	0.80	4.8
GUCC0500	5	0.25			1.0	Optional	0.80	5.1		
GUCC0600	6	0.25			1.0	Optional	0.80	5.4		
GUCC0700	7	0.25			1.0	Optional	0.80	5.4		
GUCC0800	8	0.25			1.0	Optional	0.80	5.7		
GUCC0900	9	0.25			1.0	Optional	0.80	6.0		
GUCC1000	10	0.25			1.0	Optional	0.80	6.3		
GUCC1500	15	0.25			1.0	Optional	0.85	7.0		
GUCC2500	25	0.25			1.0	Optional	1.00	8.6		
GUCC3700	37	0.25			1.0	Optional	1.00	9.7		
GUCC5000	50	0.25			1.0	Optional	1.00	11.0		
GUCD0300	24	7/0.203			3	0.25	1.1	Optional	0.80	4.7
GUCD0400					4	0.25	1.1	Optional	0.80	5.1
GUCD0500			5	0.25	1.1	Optional	0.80	5.6		
GUCD0600			6	0.25	1.1	Optional	0.80	5.7		
GUCD0700			7	0.25	1.1	Optional	0.80	5.7		
GUCD0800			8	0.25	1.1	Optional	0.80	6.2		
GUCD0900			9	0.25	1.1	Optional	0.85	6.4		
GUCD1000			10	0.25	1.1	Optional	0.85	6.7		
GUCD1500			15	0.25	1.1	Optional	0.85	7.4		
GUCD2500			25	0.25	1.1	Optional	1.00	9.1		
GUCD3700			37	0.25	1.1	Optional	1.00	10.3		
GUCD5000			50	0.25	1.1	Optional	1.00	11.9		
GUCE0300			22	17/0.16	3	0.25	1.3	Optional	0.80	5.3
GUCE0400					4	0.25	1.3	Optional	0.80	5.6
GUCE0500	5	0.25			1.3	Optional	0.80	6.1		
GUCE0600	6	0.25			1.3	Optional	0.80	6.3		
GUCE0700	7	0.25			1.3	Optional	0.80	6.3		
GUCE0800	8	0.25			1.3	Optional	0.85	6.9		
GUCE0900	9	0.25			1.3	Optional	0.85	7.3		
GUCE1000	10	0.25			1.3	Optional	0.85	7.4		
GUCE1500	15	0.25			1.3	Optional	0.85	8.3		
GUCE2500	25	0.25			1.3	Optional	1.00	10.6		
GUCE3700	37	0.25			1.3	Optional	1.00	11.9		
GUCE5000	50	0.25			1.3	Optional	1.00	13.5		
GUCG0200	18	34/0.18			2	0.40	2.0	Optional	0.80	6.3
GUCG0300					3	0.40	2.0	Optional	0.80	6.6
GUCG0400			4	0.40	2.0	Optional	0.85	7.2		
GUCG0500			5	0.40	2.0	Optional	0.85	7.8		

Multi-Conductor

UL2464

Computer Cable (Pair Type)


Foil Shield Type

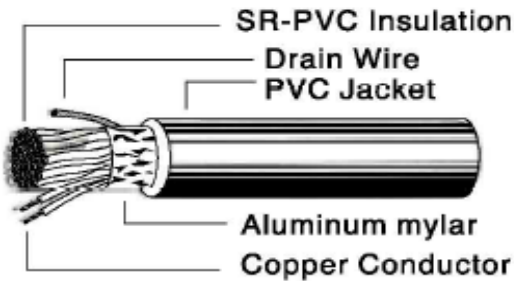

Description

1. Tinned stranded copper conductor
2. Color-coded PVC or semi-rigid PVC insulation
3. Paired cores cable under aluminium mylar shield
4. Tinned stranded copper drain wire
5. PVC jacket paired computer and data transmission cable
6. Rated temperature: 80°C
7. Rated voltage: 300V
8. Pass VW-1 SC vertical flame test

Braid Shield Type

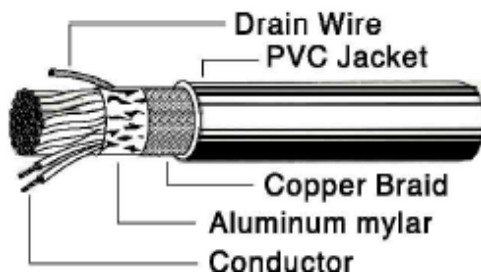

Description

1. Tinned stranded copper conductor
2. Color-coded PVC or semi-rigid PVC insulation
3. Paired cores cable under aluminium mylar shield
4. Tinned stranded copper drain wire
5. Tinned copper braid shield, coverage is optional
6. PVC jacket paired computer and data transmission cable
7. Rated temperature: 80°C
8. Rated voltage: 300V
9. Pass VW-1 SC vertical flame test

Application:

Foil Shield Type: Sound broadcast, audio, instrumentation and computer cable for EIA RS-232

Braid Shield Type: Computer cables for EIA RS-232 & CAD/CAM

Ordering #	Conductor		Core #	Nom. Insulation Thickness (mm)	Insulation Diameter (mm)	Braid Shield Coverage (%)	Jacket Thickness (mm)	Overall Diameter (mm)
	(Sec. area)	(No./mm)						
GUDD0400	24 Foil Shield	7/0.203	4	0.25	1.1	-	0.85	6.6
GUDD0600			6	0.25	1.1	-	0.85	7.2
GUDD0700			7	0.25	1.1	-	0.85	7.8
GUDD0800			8	0.25	1.1	-	0.85	8.0
GUDD0900			9	0.25	1.1	-	0.85	8.6
GUDD1000			10	0.25	1.1	-	1.02	9.0
GUDD1500			15	0.25	1.1	-	1.02	10.6
GUDD1900			19	0.25	1.1	-	1.02	11.6
GUDD2500			25	0.25	1.1	-	1.02	12.5
GUDD5000			50	0.25	1.1	-	1.02	17.7
GUDD0250	24 Braid Shield	7/0.203	2	0.25	1.1	Optional	0.8	6.3
GUDD0350			3	0.25	1.1	Optional	0.85	6.9
GUDD0450			4	0.25	1.1	Optional	0.85	7.2
GUDD0550			5	0.25	1.1	Optional	0.85	7.4
GUDD0650			6	0.25	1.1	Optional	0.85	7.7
GUDD0750			7	0.25	1.1	Optional	1.02	8.0
GUDD0850			8	0.25	1.1	Optional	1.02	8.5
GUDD1050			10	0.25	1.1	Optional	1.02	9.5
GUDD1550			15	0.25	1.1	Optional	1.02	11.2
GUDD1850			18	0.25	1.1	Optional	1.02	12.1
GUDD2550	25	0.25	1.1	Optional	1.02	13.0		