


Multi-Conductor

UL 2725

Mouse Cable

Construction

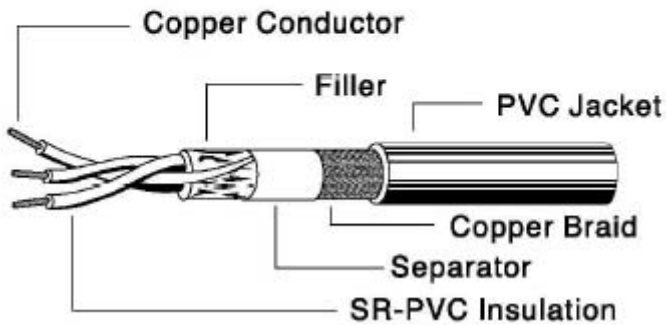

Product Description

1. Tinned stranded copper conductor
2. Color-coded PVC or semi-rigid PVC insulation
3. Paper separator applied
4. Overall tinned copper braid shield 75% coverage or tinned copper spiral shield 90% coverage
5. PVC jacket
6. Rated temperature: 60°C , 80°C
7. Rated voltage: 30V
8. Pass VW-1 SC vertical flame test

Application:

1. Control cable for computer mouse and light pen.

Part No.	Conductor		NO. Of Core	Insulation Thickness	Insulation Diameter	Braid Shield	Jacket Thickness	Overall Diameter
	AWG	No./mm		mm	mm	coverage	mm	mm
GUHA0300	30	7/0.102	3	0.18	0.70	75%	0.51	3.6
GUHA0500			5	0.18	0.70	75%	0.51	3.8
GUHA0700			7	0.18	0.70	75%	0.51	4.0
GUHA0900			9	0.18	0.70	75%	0.51	4.2
GUHB0300	28	10/0.10 Or 19/0.08	3	0.18	0.80	75%	0.51	3.6
GUHB0500			5	0.18	0.80	75%	0.51	3.8
GUHB0700			7	0.18	0.80	75%	0.51	4.0
GUHB0900			9	0.18	0.80	75%	0.51	4.2